




# Stromboli EXPLOSION




ISO 9001:2015 ISO 14001:2015

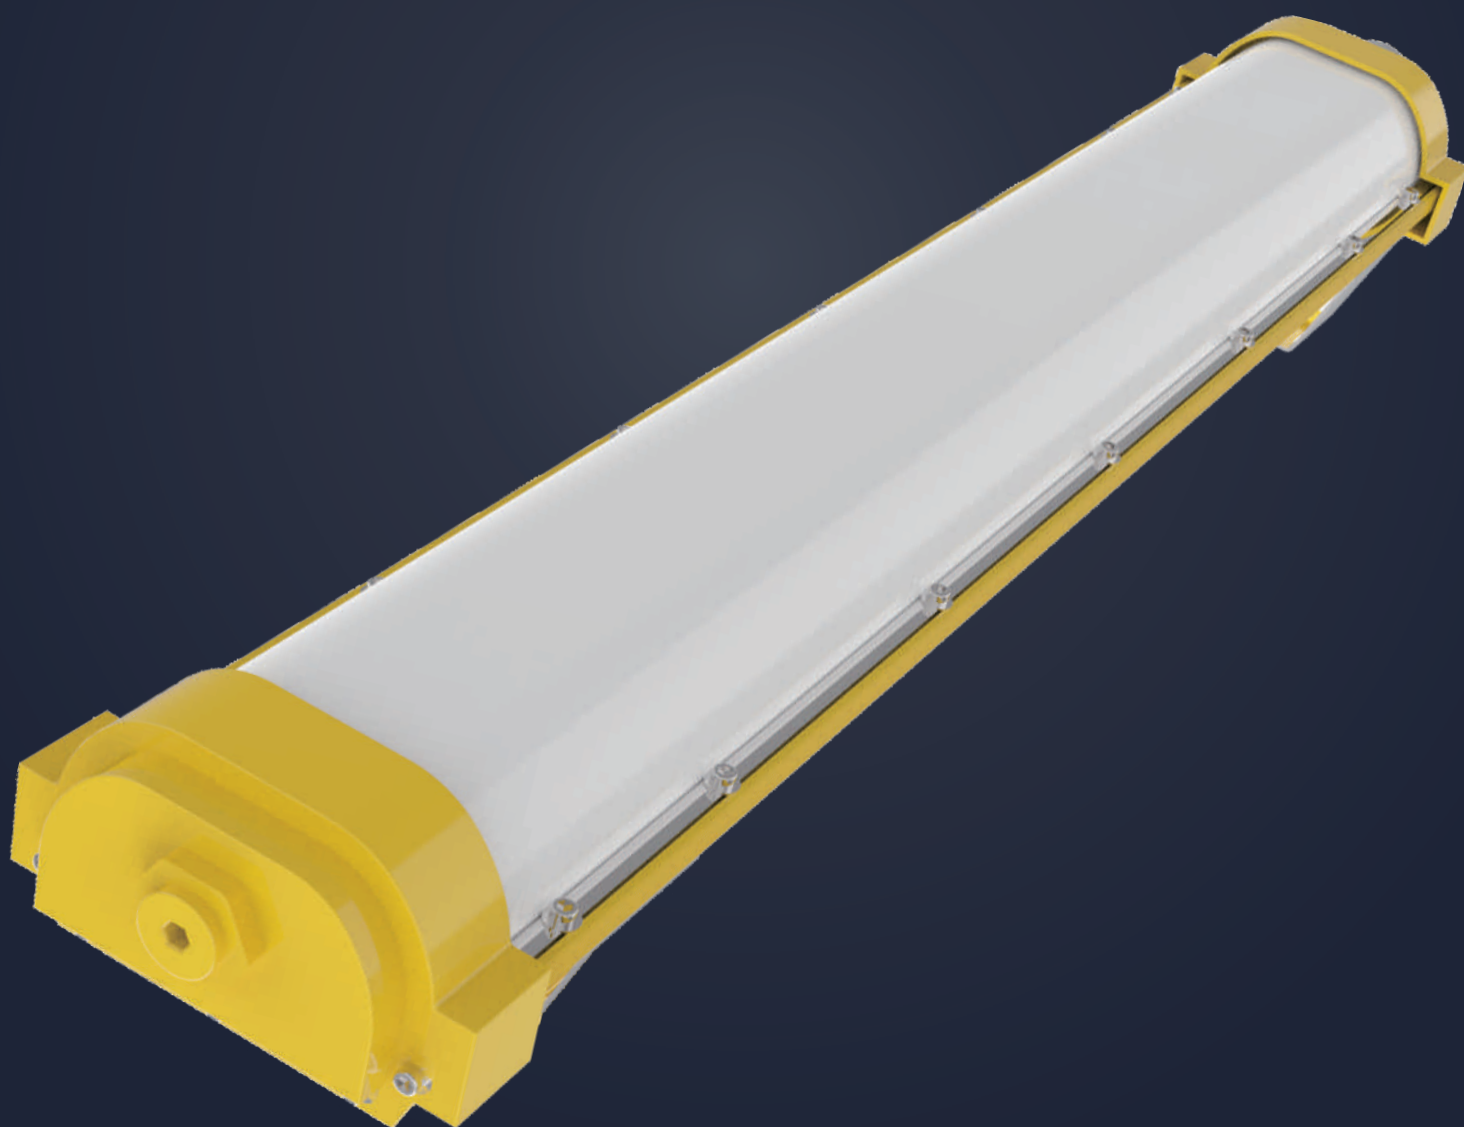

RoHS compliant



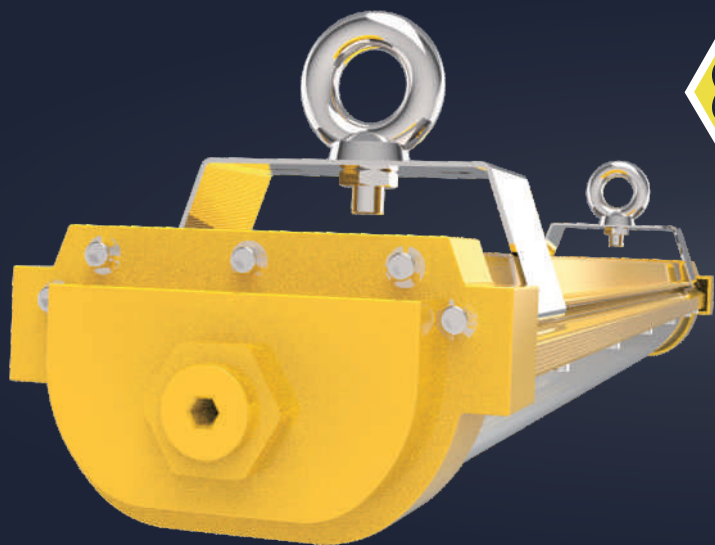

## Stromboli **EXPLOSION**


With ATEX certified, our explosion proof light fixture can be widely used for place of flammable and explosive chemical materials.



**Patent**

## **Design Patent**

Aluminum housing  
High thermal conductivity  
Low lumen decay, L70=50,000hours  
Impact test IK10  
Waterproof IP66

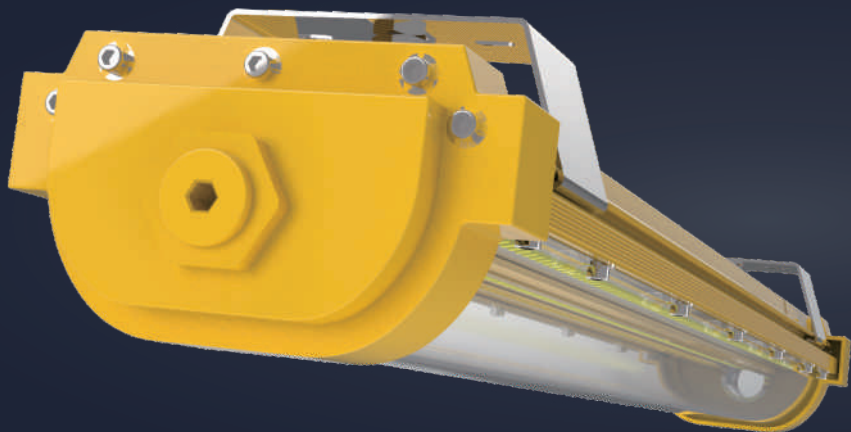

**II 2 G Ex e mb IIC T6 Gc**

IP66  
IK10

## Features

1. Increased safety type of explosion proof grade, 95-265V alternating current and 24V direct current for option;
2. Integrated type of tube, adopt SMD LED on aluminum base, make aluminum base completely attached to heat sink which composed of lamp body to make sure excellent heat dissipation, lead to long lifetime.
3. Adopt silicon encapsulated sealed power supply whose body made of aluminum alloy, put it inside of aluminum body and closed attached to heat sink to make sure heat dissipated from power supply.
4. Cover made of high quality PC which enjoy high-strength, impact resistant, hot resistant, corrosion-resistant.
5. Completely sealed to waterproof, dust-proof, corrosion-resistant.
6. Smart appearance, equip with two mounting brackets, it can be installed easily.

## Standard

The drawings, technical documents and the samples are verified and certified according to stands for safety as below:

EN60079-0-2010 explosive atmospheres Part 1: Equipment-General requirements

EN60079-0-2010 explosive atmospheres Part 3: Equipment protection by increased safety “e”


EN60079-18-2004 Electrical apparatus for explosive gas atmosphere 9:Encapsulation

## Features

Applied to oil fields, oil refineries, offshore oil platform, power plants, gas stations, oil tanks, wharf, tunnel, pumping station, substation, the military base, etc. Zone I and Zone II Hazardous Locations, Zone 20, Zone 21, Zone 22 and II A, IIB, IIC explosive gas atmosphere.

## Mark

Ex emb IIC T6 Gc

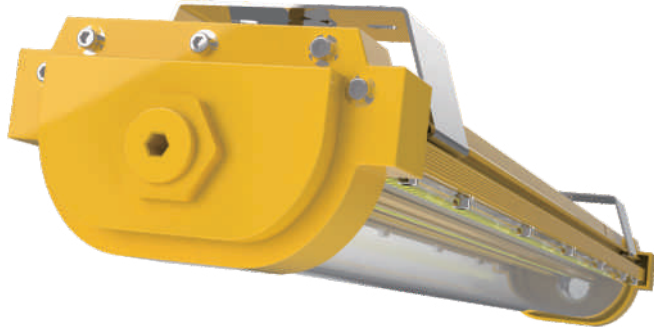

## Features

Explosion proof aluminum housing  
 High thermal conductivity  
 With Bridgelux led, initial efficiency 170lm/w  
 Lifud Driver, Efficiency>92%,  
 Low lumen decay, L70=50,000hours  
 Long lifetime 50,000hours  
 Impact test IK10  
 Waterproof IP66  
 Energy saving up to 90%  
 Electrical: 100~277V, 50-60Hz  
 CRI>70 (Ra80/90 for option)  
 Surge protection: 2KV



## Dimming & Sensor Options




## Application

Warehouse / Factory / Parking  
 Flammable and explosive chemical materials storage



**120lm/w**


**Bridgelux LED**

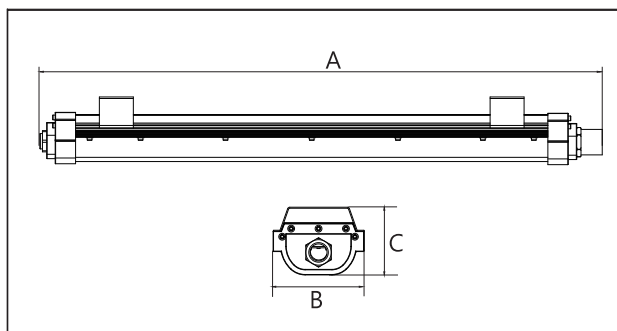

Model	Watt (W)	Voltage (V)	Lumen (lm)	CRI	Power factor	Beam Angle	IP	IK	LED	A*B*C
LEDIKEX-60-20W	20W	100~277V	2400	>70	>0.95	160°	IP66	IK10	Bridgelux	662*107*61
LEDIKEX-60-40W	40W	100~277V	4800	>70	>0.95	160°	IP66	IK10	Bridgelux	662*107*61
LEDIKEX-120-40W	40W	100~277V	4800	>70	>0.95	160°	IP66	IK10	Bridgelux	1262*107*61
LEDIKEX-120-60W	60W	100~277V	7200	>70	>0.95	160°	IP66	IK10	Bridgelux	1262*107*61
LEDIKEX-120-80W	80W	100~277V	9600	>70	>0.95	160°	IP66	IK10	Bridgelux	1262*107*61

# Installation

## Suspending

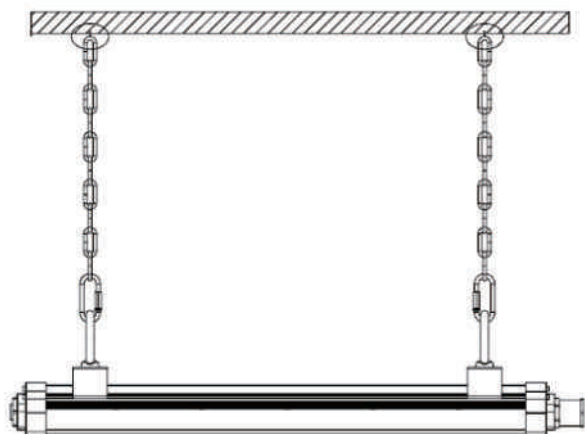

## Surface Mounting

